


NITECORE® 奈特科尔 EMR20

▲警告

使用前请仔细阅读使用说明。
本品并非玩具，仅供成人使用。

产品介绍

EMR20 专为户外作业、野营、钓鱼、徒步等户外活动而设计

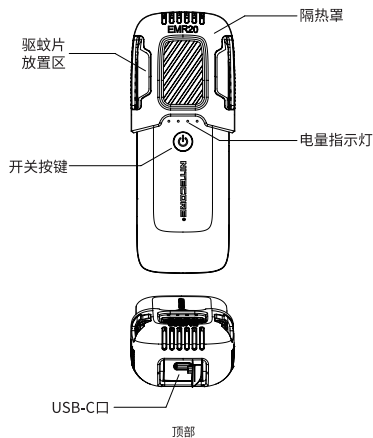

产品参数


输入电压	USB-C: 5V-2.4A 9V-2A (18W 最大)
输出电压	USB-C: 5V-2.4A 9V-2A 12V-1.5A (18W 最大)
额定容量	6400mAh 5V (TYP 1A)
电池容量	10000mAh 36Wh
加热温度	125°C (257 °F) (最高)
模式	室内模式: 10m ² 保护区域 户外模式: 20m ² 保护区域
尺寸	135mm x 48.8mm x 31mm (5.3" x 1.9" x 1.2") (不含配件)
重量	227g ± 5g (8oz ± 0.1oz) (不含配件)
配件	隔热罩、USB-C 充电线、驱蚊片 x 10
防护等级	IPX5

充电:

连接电源:

把 USB-C 充电线一端连至本品 USB-C 接口, 另一端接上 USB 适配器、移动电源或其他 USB 供电设备。(输入: 5V-2A 9V-2A)

注: 在充电过程中, 可开启驱蚊功能。



操作说明

- **开启:** 关闭状态下, 短按再长按开关按钮, 4 颗电量指示灯递增至全亮, 开启驱蚊功能。按键指示灯蓝色长亮, 此时默认开启户外模式。
- **关闭:** 开启状态下, 长按开关按钮电量指示灯递减至全灭, 开关按钮指示灯关闭, 即关闭驱蚊功能。
- **室内模式 / 户外模式切换:** 开启驱蚊功能状态下, 短按开关按钮可切换模式。开关按钮指示灯蓝色长亮为户外模式, 绿色指示灯长亮为室内模式。

电量提示

- 短按开关按钮, 电量指示灯将会亮起提示剩余电量。当只有 1 颗电量指示灯闪烁, 代表电量低, 提示应及时进行充电。
- 充电过程中, 电量指示灯会闪烁提示充电进度。充满电时, 4 颗电量指示灯长亮。


指示灯	剩余电量
4 颗亮起	约 100%
3 颗亮起	约 75%
2 颗亮起	约 50%
1 颗亮起	约 25%
1 颗闪烁	电量低, 请及时进行充电

使用 EMR20

- (1) 关闭状态下, 取 1 片驱蚊片插至驱蚊片放置区上。
 - (2) 开启驱蚊功能。
 - (3) 10 分钟后即可建立保护区域。
 - (4) 使用完毕后, 长按开关按钮即关闭, 让其进行完全冷却才可存储。
- 注: 奈特科尔驱蚊片尺寸 34mm x 48mm 功效最长可达 6 小时 / 片。

替换驱蚊片

请确保 EMR20 已经关闭并且冷却, 插入新的驱蚊片将使用过的驱蚊片推出。

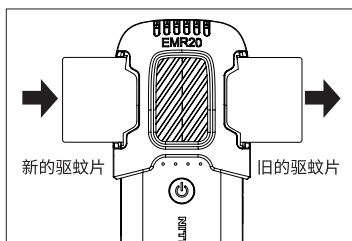

放置 EMR20

- 有风状态, 请将 EMR20 放在驱蚊区域的上风处。
- 使用过程中请不要覆盖 EMR20。
- 如果驱蚊区域面积过大, 建议多个 EMR20 一起使用。

给其他设备充电

USB 输出功能: EMR20 具有 USB 输出功能, 可作为移动电源为外部 USB 充电设备供电。

连接外部设备: 把 USB-C 充电线一端连至本品输出接口, 另一端接上充电设备, 即可对设备进行充电。

注: 放电过程中, 若电池电压过低会自动关闭输出以保护电池。

保存和运输

- 本产品在不使用时, 请储存在干燥的室温环境中。
- 当需要长时间储存本品时, 请每 3 个月充电一次。

注意事项

1. 在使用驱蚊功能时, 请安装上隔热罩, 以防高温烫伤。
2. 本品适用人群为 18 岁以上成年人, 请远离儿童。
3. 为了减少烫伤风险, 当在儿童附近使用本品时, 需要进行密切地监护。
4. 当本品开始工作时, 不可无人看管。若发现有任何故障, 请立即停止操作。
5. 请勿将本品放置在水中。
6. 请勿将手指、金属或者其他外来物体放入本品中。
7. 请勿在密闭的空间中使用本品。
8. 如果发现电池有任何泄漏、异味或变形, 应立即停止使用并将其安全处理。
9. 不要让本产品长时间处于高于 60°C 的环境中。
10. 切勿擅自拆卸、组装或改装本品, 可能会导致保修服务失效, 详情请查看保固条款。

保固服务

NITECORE® 产品拥有售后保固服务。在购买本产品的 15 天内, 如果有任何质量问题均可向经销商要求免费更换。在购买本产品的 12 个月内享受免费保固服务。在超过 12 个月免费保固期后, 厂家将收取相应的材料费以及快递费。

本保固规则不适用于以下情况:

1. 人为破坏, 拆解, 改装本产品。
2. 错误操作导致产品损坏。

如对奈特科尔产品有任何疑问, 欢迎联系当地的代理商或发邮件到 4008869828@nitecore.cn

※ 本说明书中出现的商标及其产品图片版权属于其合法持有人, 此处仅作展示所用。

※ 本说明书的所有图片、陈述及文字信息仅供参考, 请以官网 www.nitecore.cn 实际信息为准。广州希脉创新科技有限公司拥有对说明书内容的最终解释权 and 修改权。

了解 NITECORE 奈特科尔最新动态, 欢迎关注:

@NITECORE 奈特科尔

@NITECORE 奈特科尔



广州希脉创新科技有限公司

咨询热线: +86-20-83862000

销售邮箱: info@nitecore.com

网址: www.nitecore.cn

地址: 广东省广州市天河区高普路 1021 号 5 楼 6355 号

邮编: 510653



EMR30082022

NITECORE®

KEEP INNOVATING


EMR20 Portable Electronic Multipurpose Repeller

⚠️IMPORTANT

Read all instructions before use.
This product is intended for adult use only. This product is not a toy.

Product Introduction

The EMR20 is specially designed for outdoor activities, such as outdoor work, camping, fishing, trekking and more.

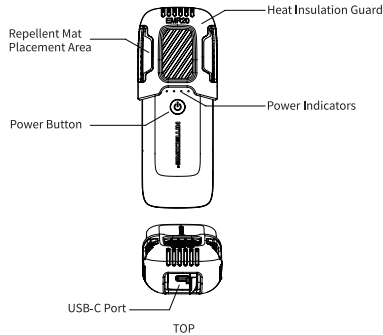

Specifications


Input	5V-2.4A / 9V-2A (18W MAX)
Output	5V-2.4A / 9V-2A / 12V-1.5A (18W MAX)
Rated Capacity	6,400mAh 5V (TYP 1A)
Capacity	10,000mAh 36Wh
Heating Temperature	125°C / 257°F MAX
Modes	Indoor Mode: 11ft Protection Zone Outdoor Mode: 16ft Protection Zone
Dimensions	135mm x 48.8mm x 31mm (5.3" x 1.9" x 1.2") (Accessories Not Included)
Weight	227g±5g (8oz±0.1oz) (Accessories Not Included)
Accessories	Heat Insulation Guard, USB-C Charging Cable, 10 x Mosquito Repellent Mats
Waterproof Rating	IPX5

Charging

Connecting to the External Power

Use the USB cable to connect an external power supply (e.g. a USB adapter, a power bank or other USB charging device) to the USB charging port to begin the charging process. (Input: 5V-2A / 9V-2A)

Note: The mosquito repelling function can be activated during the charging process.



Operating Instructions

- On:** When the EMR20 is off, short press and then long press the Power Button until all 4 indicators turn on one by one to activate the mosquito repelling function, after which the blue indicator beneath the Power Button will remain steadily turned on to indicate the access to Outdoor Mode (Default Startup Mode).
- Off:** When the EMR20 is on, long press the Power Button until all 4 power indicators turn off one by one to turn off the mosquito repelling function.
- Mode Switching:** When the mosquito repelling function is on, short press the Power Button to switch between Indoor Mode and Outdoor Mode. If the blue indicator beneath the Power Button is steadily on, the EMR20 is in Outdoor Mode. If the green indicator is steadily on, the EMR20 is in Indoor Mode.

Power Indication

- Short press the Power Button and the power indicators will turn on to indicate the power level. The EMR20 needs to get recharged when the last power indicator flashes to indicate low power.
- During the charging process, the power indicators will flash to indicate the power level. All 4 indicators will turn on steadily when the product is fully charged.

Status of Indicators	Power Level
4 Constant-on	Approx. 100%
3 Constant-on	Approx. 75%
2 Constant-on	Approx. 50%
1 Constant-on	Approx. 25%
1 Flashing	Nearly Depleted (Please charge the product as soon as possible)


Using the EMR20

- When the product is off, insert 1 repellent mat into the Repellent Mat Placement Area.
- Activate the mosquito repelling function.
- The protection zone will be created after 10 minutes.
- After use, long press the Power Button to turn off the mosquito repelling function. Please store the product after cooling completely.

Note: NITECORE Mosquito Repellent Mat Size: 34mm x 48mm / 1.34" x 1.89" (up to 6 hours each)

Mosquito Repellent Mat Replacement

Make sure the EMR20 is off and cooled. Insert a new repellent mat while pushing out the used one.

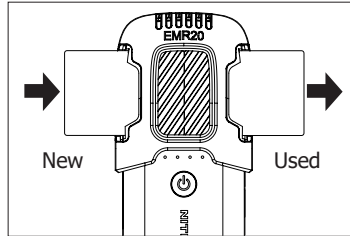

EMR20 Placement

- Place the EMR20 upwind of the mosquito repellent area if it is windy.
- DO NOT cover the EMR20 during the using process.
- It is recommended to use multiple EMR20 together to create a larger protection zone.

Charging the External Device

USB Output: Available with the USB output, the EMR20 can be used as a power supply to charge external devices.

Connecting to the External Device: Use the USB cable to connect an external USB device to the USB charging port to begin the charging process.

Note: During the discharging process, the USB output will be automatically off to protect the battery if the battery voltage is low.

Storage and Transportation

- Store the product in ventilated and dry places at room temperature.
- Charge the product every 3 months if it is not used for a long period of time.

Warnings

- Please install the Heat Insulation Guard when using the product to prevent scalds.
- The product is designed to be used by adults. Keep the product out of reach of children.
- Children under 16 years old must be under adult supervision when using this product to prevent scalds and accidents.
- DO NOT leave the product unattended when it is in use. Stop using the product at any sign of malfunction.
- DO NOT place the product in water.
- DO NOT put your fingers, metals or foreign matters into the product to avoid accidents or damage.
- DO NOT use the product in a confined space.
- Stop using the product and dispose of it immediately if there is any leakage, odor, or deformation in the battery.
- DO NOT expose the product to temperatures above 60°C (140°F) for a long time.
- DO NOT disassemble or modify the product without authorization, as this will cause the warranty to be nullified. Please check the Warranty Service for details.

Warranty Service

All NITECORE® products are warranted for quality. Any DOA / defective product can be exchanged for a replacement through a local distributor/dealer within 15 days of purchase. After that, all defective / malfunctioning NITECORE® products can be repaired free of charge within 12 months from the date of purchase. Beyond 12 months, the charge for accessories, replacement parts and delivery shall be at your own expenses. The warranty will be nullified if

- the product(s) is/are broken down, reconstructed and/or modified by unauthorized parties.
 - the product(s) is/are damaged due to improper use.
- For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

※ The trademarks and product images specified herein this user manual are for reference purposes only. The copyright belongs to their lawful holders.

※ All images, texts and statements specified herein this user manual are for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, Sysmax Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

Worldwide Warranty Service

Model number	Date of purchase
Serial number	Store Stamp

This is the certificate of authenticity if this item and we confirm that it has been subjected to the most exacting quality controls by SYSMAX Innovations Co., Ltd.

NOTE:

Please ensure this warranty card is fully completed by the distributor or retailer after purchasing the product. Should the product fail to operate correctly during the warranty period, it may be returned with the completed warranty card and original sales receipt to the retailer or local distributor for replacement or repair.

Customer Service Email: service@nitecore.com

SYSMAX Innovations Co., Ltd.

TEL: +86-20-83862000
FAX: +86-20-83882723
E-mail: info@nitecore.com
Web: www.nitecore.com
Address: Unit 6355, 5/F, No.1021
Gaopu Road, Tianhe District,
Guangzhou, 510653, Guangdong, China



Find us on Facebook: NITECORE Charger
Thanks for purchasing NITECORE!